



# A domain decomposition method for boundary element approximations of the elasticity equations

Abdellatif Ellabib, Abdeljalil Nachaoui

## ► To cite this version:

Abdellatif Ellabib, Abdeljalil Nachaoui. A domain decomposition method for boundary element approximations of the elasticity equations. *Analele Universității din Craiova*, 2015, 42 (1), pp.211-225. hal-00144940

**HAL Id: hal-00144940**

**<https://hal.science/hal-00144940>**

Submitted on 7 May 2007

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# A DOMAIN DECOMPOSITION METHOD FOR BOUNDARY ELEMENT APPROXIMATIONS OF THE ELASTICITY EQUATIONS

ABDELLATIF ELLABIB<sup>1</sup> AND ABDELJALIL NACHAOUI<sup>2</sup>

**Abstract.** In this paper, we discuss a domain decomposition method to solve linear elasticity problems in complicated 2-D geometries  $\Omega$ . We describe in details algebraic system corresponding to Dirichlet-Neumann and Schwarz methods. The alternating iterative algorithm obtained is numerically implemented using the boundary element method. The stopping and accuracy criteria, and two type of domain are investigated which confirm that the iterative algorithm produces a convergent and accurate numerical solution with respect to the number of iterations.

**Résumé.** Dans ce travail, nous nous intéressons à l'application de la méthode de décomposition en sous-domaines à un problème d'élasticité linéaire. L'approximation se fait par les équations intégrales et les éléments de frontières. Nous décrivons les systèmes algébriques issus des méthodes de décomposition avec recouvrement et sans recouvrement. Nous présentons ensuite deux algorithmes. Les résultats numériques illustrent la convergence de ces deux algorithmes vers la solution du problème d'élasticité linéaire dans différents domaines.

## INTRODUCTION

Domain decomposition ideas have been applied to a wide variety of problems. We could not hope to include all these techniques in this work. For an extensive survey of recent advances, we refer to the proceedings of the annual domain decomposition meetings see. <http://www.ddm.org>. Domain decomposition algorithms is divided into two classes, those that use overlapping domains, which refer to as Schwarz methods, and those that use non-overlapping domains, which we refer to as substructuring.

Any domain decomposition method is based on the assumption that the given computational domain  $\Omega$  is decomposed into subdomains  $\Omega_i$ ,  $i = 1, \dots, M$ , which may or may not overlap. Next, the original problem can be reformulated upon each subdomain  $\Omega_i$ , yielding a family of subproblems of reduced size that are coupled one to another through the values of the unknowns solution at subdomain interfaces. Fruitful references can be found in [9, 10].

A numerical study of elasticity equations by domain decomposition method combined with finite element method was treated in [3, 5, 6]. A symmetric boundary element analysis with domain decomposition is studied in [4, 8]. This combination was also used for biharmonic equation in two overlapping disks [1].

We have chosen to associate the Dirichlet-Neumann and Schwarz methods with the direct boundary element method. Indeed, it only requires the discretization of the boundaries of the subdomains. This technique

---

<sup>1</sup> Université Cadi Ayyad, Faculté des Sciences et Techniques, Département de Mathématiques et Informatique, Avenue Abdelkrim Elkhatabi, B.P 549, Guéliz Marrakech, Maroc. [ellabib@fstg-marrakech.ac.ma](mailto:ellabib@fstg-marrakech.ac.ma)

<sup>2</sup> Laboratoire de Mathématiques Jean Leray, UMR 6629, Université de Nantes/CNRS/ECN, 2 rue de la Houssinière, BP 92208, 44322 Nantes, France. [nachaooui@math.univ-nantes.fr](mailto:nachaooui@math.univ-nantes.fr)

of coupling reduces the number of unknowns and the time of computing. It has been used successfully for semiconductors simulation [7].

We consider a linear elasticity material which occupies an open bounded domain  $\Omega \subset \mathbb{R}^2$ , and assume that  $\Omega$  is bounded by  $\Gamma = \partial\Omega$ . We also assume that the boundary consists of two parts  $\Gamma = \Gamma_1 \cup \Gamma_2$  where  $\Gamma_1$  and  $\Gamma_2$  are not empty and  $\Gamma_1 \cap \Gamma_2 = \emptyset$  where  $\Omega$  is not necessarily circular or rectangular.

Let  $\mathcal{V} = (u, v)$  the displacement vector and  $\mathcal{S} = (t, s)$  the traction vector governed by the following linear elasticity problem

$$\begin{aligned} G\Delta u + \frac{G}{1-2\nu} \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 v}{\partial x \partial y} \right) &= 0 \text{ in } \Omega, \quad G\Delta v + \frac{G}{1-2\nu} \left( \frac{\partial^2 u}{\partial x \partial y} + \frac{\partial^2 v}{\partial y^2} \right) = 0 \text{ in } \Omega \\ u &= \tilde{u}, \quad v = \tilde{v} \quad \text{on } \Gamma_1 \quad t = \tilde{t}, \quad s = \tilde{s} \quad \text{on } \Gamma_2 \end{aligned} \quad (1)$$

with  $G$  and  $\nu$  the shear modulus and Poisson ratio, respectively, and where  $\tilde{u}$ ,  $\tilde{v}$ ,  $\tilde{t}$  and  $\tilde{s}$  are the prescribed quantities.

The main body of this paper begins a description of Dirichlet-Neumann and Schwarz methods for elasticity equations (1), in section 2. Integral formulation and boundary element method are also exposed in subsection 3.1 and 3.2. The technique to obtain algebraic systems on each subdomain for Dirichlet-Neumann and Schwarz methods is detailed in section 4. Two algorithm to implement domain decomposition method combined with boundary element for elasticity equations (1) are presented, and numerical results in the case of 2-D complicated geometries are given in section 5. The paper ends with conclusion in section 6.

## 1. DOMAIN DECOMPOSITION TECHNIQUES

In order to use domain decomposition to linear elasticity, we describe, in this section, Dirichlet-Neumann and Schwarz methods.

### 1.1. Dirichlet-Neumann substructuring method

We decompose  $\Omega$  into two non-overlapping subdomains  $\Omega_1$  and  $\Omega_2$  such that  $\Omega = \Omega_1 \cup \Omega_2$ , and denote by  $\Gamma_{12} = \partial\Omega_1 \cap \partial\Omega_2$  the common interface between  $\Omega_1$  and  $\Omega_2$ . We can write this method as follows.

- Step 1. Specify an initial  $\Lambda^0 = (\lambda^0, \beta^0)$  on interface  $\Gamma_{12}$  and  $k = 0$ .
- Step 2. Solve the mixed well-posed direct problem

$$\begin{cases} G\Delta u_1^k + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_1^k}{\partial x^2} + \frac{\partial^2 v_1^k}{\partial x \partial y} \right) = 0 \text{ in } \Omega_1, & G\Delta v_1^k + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_1^k}{\partial x \partial y} + \frac{\partial^2 v_1^k}{\partial y^2} \right) = 0 \text{ in } \Omega_1 \\ u_1^k = \tilde{u}, \quad v_1^k = \tilde{v} \text{ on } \Gamma_1 \cap \partial\Omega_1, & t_1^k = \tilde{t}, \quad s_1^k = \tilde{s} \text{ on } \Gamma_2 \cap \partial\Omega_1, \quad u_1^k = \lambda^k, \quad v_1^k = \beta^k \text{ on } \Gamma_{12} \end{cases} \quad (2)$$

to determine the traction  $\mathcal{S}_1^k = (t_1^k, s_1^k)$  on the interface  $\Gamma_{12}$ .

- Step 3. Solve the mixed well-posed direct problem

$$\begin{cases} G\Delta u_2^k + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_2^k}{\partial x^2} + \frac{\partial^2 v_2^k}{\partial x \partial y} \right) = 0 \text{ in } \Omega_2, & G\Delta v_2^k + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_2^k}{\partial x \partial y} + \frac{\partial^2 v_2^k}{\partial y^2} \right) = 0 \text{ in } \Omega_2 \\ u_2^k = \tilde{u}, \quad v_2^k = \tilde{v} \text{ on } \Gamma_1 \cap \partial\Omega_2, & t_2^k = \tilde{t}, \quad s_2^k = \tilde{s} \text{ on } \Gamma_2 \cap \partial\Omega_2, \quad t_2^k = -t_1^k, \quad s_2^k = -s_1^k \text{ on } \Gamma_{12} \end{cases} \quad (3)$$

to determine the displacement  $\mathcal{V}_2^k = (u_2^k, v_2^k)$  on the interface  $\Gamma_{12}$ .

- Step 4. Update  $\Lambda^{k+1} = (\lambda^{k+1}, \beta^{k+1})$  on the interface  $\Gamma_{12}$  by

$$\lambda^{k+1} = \theta u_2^k + (1-\theta)\lambda^k \text{ on } \Gamma_{12}, \quad \beta^{k+1} = \theta v_2^k + (1-\theta)\beta^k \text{ on } \Gamma_{12} \quad (4)$$

- Step 5. Repeat step 2 from  $k \geq 0$  until a prescribed stopping criterion is satisfied.

where  $\theta$  is positive parameter. This algorithm establish the solution of elasticity equations of Problem 1 in  $\Omega$  as a limit of sequence  $(u_1^k, v_1^k, u_2^k, v_2^k)$ .

For this algorithm the following stopping criterion is used

$$\max (\|\lambda^{k+1} - \lambda^k\|_{L^2(\Gamma_{12})}, \|\beta^{k+1} - \beta^k\|_{L^2(\Gamma_{12})}) < Tol, \quad (5)$$

where  $Tol$  is a prescribed tolerance.

## 1.2. Schwarz overlapping method

We decompose  $\Omega$  into two overlapping subdomains  $\Omega_1$  and  $\Omega_2$  such that  $\Omega = \Omega_1 \cup \Omega_2$ , and denote by  $\Gamma_{11} = \partial\Omega_1 \cap \overline{\Omega_2}$  and  $\Gamma_{22} = \partial\Omega_2 \cap \overline{\Omega_1}$ . This method is summarized in the following.

- Step 1. Specify an initial  $\mathcal{V}_2^0 = (u_2^0, v_2^0)$  on  $\Gamma_{11}$  and  $k = 0$ .
- Step 2. Solve the mixed well-posed direct problem

$$\left\{ \begin{array}{l} G\Delta u_1^{k+1} + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_1^{k+1}}{\partial x^2} + \frac{\partial^2 v_1^{k+1}}{\partial x \partial y} \right) = 0 \text{ in } \Omega_1, \quad G\Delta v_1^{k+1} + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_1^{k+1}}{\partial x \partial y} + \frac{\partial^2 v_1^{k+1}}{\partial y^2} \right) = 0 \text{ in } \Omega_1 \\ u_1^{k+1} = \tilde{u}, \quad v_1^{k+1} = \tilde{v} \text{ on } \Gamma_1 \cap \partial\Omega_1, \quad t_1^{k+1} = \tilde{t}, \quad s_1^{k+1} = \tilde{s} \text{ on } \Gamma_2 \cap \partial\Omega_1, \quad u_1^{k+1} = u_2^k, \quad v_1^{k+1} = v_2^k \text{ on } \Gamma_{11} \end{array} \right. \quad (6)$$

to determine the displacement  $\mathcal{V}_1^{k+1} = (u_1^{k+1}, v_1^{k+1})$  and traction  $\mathcal{S}_1^{k+1} = (t_1^{k+1}, s_1^{k+1})$  on the boundary of  $\Omega_1$ .

- Step 3. Compute the displacement  $\mathcal{V}_1^{k+1} = (u_1^{k+1}, v_1^{k+1})$  on  $\Gamma_{22}$  as an internal displacement of linear elasticity equations in  $\Omega_1$ .
- Step 4. Solve the mixed well-posed direct problem then

$$\left\{ \begin{array}{l} G\Delta u_2^{k+1} + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_2^{k+1}}{\partial x^2} + \frac{\partial^2 v_2^{k+1}}{\partial x \partial y} \right) = 0 \text{ in } \Omega_2, \quad G\Delta v_2^{k+1} + \frac{G}{1-2\nu} \left( \frac{\partial^2 u_2^{k+1}}{\partial x \partial y} + \frac{\partial^2 v_2^{k+1}}{\partial y^2} \right) = 0 \text{ in } \Omega_2 \\ u_2^{k+1} = \tilde{u}, \quad v_2^{k+1} = \tilde{v} \text{ on } \Gamma_1 \cap \partial\Omega_2, \quad t_2^{k+1} = \tilde{t}, \quad s_2^{k+1} = \tilde{s} \text{ on } \Gamma_2 \cap \partial\Omega_2, \quad u_2^{k+1} = u_1^{k+1}, \quad v_2^{k+1} = v_1^{k+1} \text{ on } \Gamma_{22} \end{array} \right. \quad (7)$$

to determine the displacement  $\mathcal{V}_2^{k+1} = (u_2^{k+1}, v_2^{k+1})$  and traction  $\mathcal{S}_2^{k+1} = (t_2^{k+1}, s_2^{k+1})$  on the boundary of  $\Omega_2$ .

- Step 5. Compute the displacement  $\mathcal{V}_2^{k+1} = (u_2^{k+1}, v_2^{k+1})$  on  $\Gamma_{11}$  as an internal displacement of linear elasticity equations in  $\Omega_2$ .
- Step 6. Repeat step 2 from  $k \geq 0$  until a prescribed stopping criterion is satisfied.

For this algorithm the following stopping criterion is used

$$\max (\|u_1^{k+1} - u_1^k\|_{L^2(\Gamma_{11})}, \|v_1^{k+1} - v_1^k\|_{L^2(\Gamma_{11})}, \|u_2^{k+1} - u_2^k\|_{L^2(\Gamma_{22})}, \|v_2^{k+1} - v_2^k\|_{L^2(\Gamma_{22})}) < Tol, \quad (8)$$

where  $Tol$  is a prescribed tolerance.

The boundary element method utilizes information on the boundaries of interest, and thus reduces the dimension of the problem by one. The displacements in the domain is uniquely defined by the displacements and tractions on the boundary. In the boundary element method, only the boundary is discretized; hence, the mesh generation is considerably simpler for this method than for space discretization techniques, such as the finite difference method or finite element method. Moreover, the Boundary element method determines simultaneously the boundary displacements and tractions, this allows us to solve problem (2), (3) without the need of further finite difference, as one would employ if using the finite element method or the finite difference method.

For these reasons we have decided in this study to use the boundary element method in order to implement the Dirichlet-Neumann and Schwarz methods.

## 2. INTEGRAL EQUATION FORMULATION AND BOUNDARY ELEMENT FOR ELASTICITY EQUATIONS

The linear elasticity problem (1) in two-dimensional case can be formulated in integral form [2] as follows

$$\int_{\Gamma} U_{ij}(P, Q) \{\mathcal{S}\}_j(Q) d\Gamma(Q) - \int_{\Gamma} T_{ij}(P, Q) \{\mathcal{V}\}_j(Q) d\Gamma(Q) = \begin{cases} \{\mathcal{V}\}_i(P) & \text{if } P \in \Omega \\ \frac{1}{2} \{\mathcal{V}\}_i(P) & \text{if } P \in \Gamma \end{cases} \quad (9)$$

for  $i, j = 1, 2$ , where  $U_{ij}$  and  $T_{ij}$  denote the fundamental displacements and tractions for the two-dimensional isotropic linear elasticity [2]. The boundary integral equations are solved using boundary element method with constant boundary elements. The boundary is divided into  $N$  constant elements. Denoting by  $\{\mathcal{V}\}^i = \{u^i, v^i\}^T$  and  $\{\mathcal{S}\}^i = \{t^i, s^i\}^T$  the displacements and tractions at the  $i^{th}$  node. Then, the discretized form of Eq. (9) can

be written as  $\frac{1}{2} \{\mathcal{V}\}^i + \sum_{j=1}^N \hat{H}^{ij} \{\mathcal{V}\}^j = \sum_{j=1}^N G^{ij} \{\mathcal{S}\}^j$  where  $G^{ij}$  and  $\hat{H}^{ij}$  are  $2 \times 2$  matrices such that  $(G^{ij})_{lm} = \int_{\Gamma_j} U_{lm}(P^i, Q) d\Gamma(Q)$  and  $(\hat{H}^{ij})_{lm} = \int_{\Gamma_j} T_{lm}(P^i, Q) d\Gamma(Q)$  for  $l, m = 1, 2$ .

Applying this equation to all the boundary nodal points yields  $2N$  equations, which can be set in matrix form as

$$H \mathcal{V} = G \mathcal{S} \quad (10)$$

where  $H = \hat{H} + \frac{1}{2}I$  and  $I$  is  $2N \times 2N$  identity matrix. The displacements in the interior of  $\Omega$  can be evaluated using Eq. (9) which after discretization becomes

$$\{\mathcal{V}\}^i = \sum_{j=1}^N G^{ij} \{\mathcal{S}\}^j - \sum_{j=1}^N \hat{H}^{ij} \{\mathcal{V}\}^j \quad (11)$$

## 3. ALGEBRAIC SYSTEMS OF DIRICHLET NEUMANN AND SCHWARZ METHODS

We consider in this work the mixed boundary condition given by Problem (2), (3), (6) and (7). In this case the rearrangement of the unknowns in Eq. (10) is necessary. In order to obtain an algebraic system, we denote the matrices  $H_i$  and  $G_i$  computed in each subdomain  $\Omega_i$  by the use of Dirichlet Neumann or Schwarz method. Note that  $H_i$  and  $G_i$  are geometry dependent matrices and depend on the type of the boundary conditions, but not on their values. Therefore the matrices  $H_i$  and  $G_i$  do not change during the iterate procedure of domain decomposition method. We suppose that the boundary  $\Gamma_j \cap \partial\Omega_i$  is divided into  $N_j$  constant elements for  $i, j = 1, 2$ .

### 3.1. Alternating algebraic system of Dirichlet-Neumann method

Let the boundary  $\Gamma_{12}$  divided into  $N_{12}$  constant elements. Due to the boundary condition of system (2) and (3), the matrices  $H_i$  and  $G_i$  are decomposed as follows

$$H_i = (H_{\Gamma_1 \cap \partial\Omega_i} \ H_{\Gamma_2 \cap \partial\Omega_i} \ H_{\Gamma_{12}}) \text{ and } G_i = (G_{\Gamma_1 \cap \partial\Omega_i} \ G_{\Gamma_2 \cap \partial\Omega_i} \ G_{\Gamma_{12}}) \quad (12)$$

The algebraic systems corresponding to subproblems (2) and (3) take the form

$$\left\{ \begin{aligned} (H_{\Gamma_1 \cap \partial\Omega_1} \ H_{\Gamma_2 \cap \partial\Omega_1} \ H_{\Gamma_{12}}) \begin{pmatrix} \mathcal{V}_1^k|_{\Gamma_1 \cap \partial\Omega_1} \\ \mathcal{V}_1^k|_{\Gamma_2 \cap \partial\Omega_1} \\ \mathcal{V}_1^k|_{\Gamma_{12}} \end{pmatrix} &= (G_{\Gamma_1 \cap \partial\Omega_1} \ G_{\Gamma_2 \cap \partial\Omega_1} \ G_{\Gamma_{12}}) \begin{pmatrix} \mathcal{S}_1^k|_{\Gamma_1 \cap \partial\Omega_1} \\ \mathcal{S}_1^k|_{\Gamma_2 \cap \partial\Omega_1} \\ \mathcal{S}_1^k|_{\Gamma_{12}} \end{pmatrix} \\ \mathcal{V}_1^k|_{\Gamma_1 \cap \partial\Omega_1} &= \tilde{V}_1, \ \mathcal{S}_1^k|_{\Gamma_2 \cap \partial\Omega_1} = \tilde{S}_1, \ \mathcal{V}_1^k|_{\Gamma_{12}} = \Lambda^k \end{aligned} \right. \quad (13)$$

and

$$\left\{ \begin{array}{l} (H_{\Gamma_1 \cap \partial \Omega_2} \ H_{\Gamma_2 \cap \partial \Omega_2} \ H_{\Gamma_{12}}) \begin{pmatrix} \mathcal{V}_2^k|_{\Gamma_1 \cap \partial \Omega_2} \\ \mathcal{V}_2^k|_{\Gamma_2 \cap \partial \Omega_2} \\ \mathcal{V}_2^k|_{\Gamma_{12}} \end{pmatrix} = (G_{\Gamma_1 \cap \partial \Omega_2} \ G_{\Gamma_2 \cap \partial \Omega_2} \ G_{\Gamma_{12}}) \begin{pmatrix} \mathcal{S}_2^k|_{\Gamma_1 \cap \partial \Omega_2} \\ \mathcal{S}_2^k|_{\Gamma_2 \cap \partial \Omega_2} \\ \mathcal{S}_2^k|_{\Gamma_{12}} \end{pmatrix} \\ \mathcal{V}_2^k|_{\Gamma_1 \cap \partial \Omega_2} = \tilde{V}_2, \ \mathcal{S}_2^k|_{\Gamma_2 \cap \partial \Omega_2} = \tilde{S}_2, \ \mathcal{S}_2^k|_{\Gamma_{12}} = -\mathcal{S}_1^k|_{\Gamma_{12}}. \end{array} \right. \quad (14)$$

The actualization of  $\Lambda^k$  is given by

$$\Lambda^{k+1} = \theta \mathcal{V}_2^k|_{\Gamma_{12}} + (1 - \theta) \Lambda^k. \quad (15)$$

Let  $X_1^k$  and  $X_2^k$  be the vectors containing the unknowns values of displacements or tractions on the boundary of subdomains  $\Omega_1$  and  $\Omega_2$  respectively. They are given by

$$X_1^k = \begin{pmatrix} \mathcal{S}_1^k|_{\Gamma_1 \cap \partial \Omega_1} \\ \mathcal{V}_1^k|_{\Gamma_2 \cap \partial \Omega_1} \\ \mathcal{S}_1^k|_{\Gamma_{12}} \end{pmatrix} \text{ and } X_2^k = \begin{pmatrix} \mathcal{S}_2^k|_{\Gamma_1 \cap \partial \Omega_2} \\ \mathcal{V}_2^k|_{\Gamma_2 \cap \partial \Omega_2} \\ \mathcal{V}_2^k|_{\Gamma_{12}} \end{pmatrix}. \quad (16)$$

The matrices  $A_1$  and  $A_2$  are defined by the following

$$A_1 = (-G_{\Gamma_1 \cap \partial \Omega_1} \ H_{\Gamma_2 \cap \partial \Omega_1} \ -G_{\Gamma_{12}}) \text{ and } A_2 = (-G_{\Gamma_1 \cap \partial \Omega_2} \ H_{\Gamma_2 \cap \partial \Omega_2} \ H_{\Gamma_{12}}). \quad (17)$$

Then the algebraic system of Dirichlet-Neumann associate to problem (2) and (3) is written in the following

$$A_1 X_1^k = -H_{\Gamma_1 \cap \partial \Omega_1} \tilde{V}_1 + G_{\Gamma_2 \cap \partial \Omega_1} \tilde{S}_1 - H_{\Gamma_{12}} \Lambda^k, \quad A_2 X_2^k = -H_{\Gamma_1 \cap \partial \Omega_2} \tilde{V}_2 + G_{\Gamma_2 \cap \partial \Omega_2} \tilde{S}_2 - G_{\Gamma_{12}} X_1^k|_{\Gamma_{12}} \quad (18)$$

and

$$\Lambda^{k+1} = \theta X_2^k|_{\Gamma_{12}} + (1 - \theta) \Lambda^k. \quad (19)$$

For simplification, let

$$B_1^k = -H_{\Gamma_1 \cap \partial \Omega_1} \tilde{V}_1 + G_{\Gamma_2 \cap \partial \Omega_1} \tilde{S}_1 - H_{\Gamma_{12}} \Lambda^k \quad (20)$$

$$B_2^k = -H_{\Gamma_1 \cap \partial \Omega_2} \tilde{V}_2 + G_{\Gamma_2 \cap \partial \Omega_2} \tilde{S}_2 - G_{\Gamma_{12}} X_1^k|_{\Gamma_{12}}. \quad (21)$$

The matrices  $A_1$  and  $A_2$  can be factorized in the following  $A_1 = \mathcal{L}_1 \mathcal{R}_1$  and  $A_2 = \mathcal{L}_2 \mathcal{R}_2$  where  $\mathcal{L}_1, \mathcal{L}_2$  are lower triangular matrices and  $\mathcal{R}_1, \mathcal{R}_2$  are upper triangular matrices. Now from (18)  $X_1^k$  and  $X_2^k$  can be obtained by backward followed by forward substitutions. This gives arise to the following algorithm :

**Algorithm 1.**

- (1) Set  $k = 0$ , choose the initial  $\Lambda^0 = (\lambda^0, \beta^0) \in \mathbb{R}^{2N_{12}}$  and a tolerance for the iterative solver
- (2) Compute  $H_i$  and  $G_i$  for subdomains  $\Omega_i$  for  $i = 1, 2$
- (3) Compute  $A_i$  using Eq. (17) for  $i = 1, 2$
- (4) Compute  $\mathcal{L}_i$  and  $\mathcal{R}_i$  (decomposition of  $A_i$ ) for  $i = 1, 2$
- (5) Repeat
  - Compute the vector containing known boundary values  $B_1^k$  using Eq. (20)
  - Solve system  $\mathcal{L}_1 \mathcal{R}_1 X_1^k = B_1^k$
  - Compute the vector containing known boundary values  $B_2^k$  using Eq. (21)
  - Solve  $\mathcal{L}_2 \mathcal{R}_2 X_2^k = B_2^k$
  - Update  $\Lambda^k = (\lambda^k, \beta^k)$  by formula (19)
  - $k = k + 1$
- Until convergence.
- (6) End.

### 3.2. Alternating algebraic system of Schwarz method

Let the boundary  $\Gamma_{ii}$  divided into  $N_{ii}$  constant elements for  $i = 1, 2$ . The matrices  $H_i$  and  $G_i$  associated to the system (6) and (7), can be decomposed as follows

$$H_i = (H_{\Gamma_1 \cap \partial\Omega_i} \ H_{\Gamma_2 \cap \partial\Omega_i} \ H_{\Gamma_{ii}}) \text{ and } G_i = (G_{\Gamma_1 \cap \partial\Omega_i} \ G_{\Gamma_2 \cap \partial\Omega_i} \ G_{\Gamma_{ii}}) \quad (22)$$

In order to compute the internal displacements in  $\Omega_i$  by Eq. (11), we introduce the matrix  $\mathcal{I}_i$  which take the form

$$\mathcal{I}_i = (-H_{\Omega_i} \ G_{\Omega_i}). \quad (23)$$

The algebraic systems obtained from boundary element discretisation of subproblems (6) and (7) take the form

$$\left\{ \begin{array}{l} (H_{\Gamma_1 \cap \partial\Omega_1} \ H_{\Gamma_2 \cap \partial\Omega_1} \ H_{\Gamma_{11}}) \begin{pmatrix} \mathcal{V}_1^{k+1}|_{\Gamma_1 \cap \partial\Omega_1} \\ \mathcal{V}_1^{k+1}|_{\Gamma_2 \cap \partial\Omega_1} \\ \mathcal{V}_1^{k+1}|_{\Gamma_{11}} \end{pmatrix} = (G_{\Gamma_1 \cap \partial\Omega_1} \ G_{\Gamma_2 \cap \partial\Omega_1} \ G_{\Gamma_{11}}) \begin{pmatrix} \mathcal{S}_1^{k+1}|_{\Gamma_1 \cap \partial\Omega_1} \\ \mathcal{S}_1^{k+1}|_{\Gamma_2 \cap \partial\Omega_1} \\ \mathcal{S}_1^{k+1}|_{\Gamma_{11}} \end{pmatrix} \\ \mathcal{V}_1^{k+1}|_{\Gamma_1 \cap \partial\Omega_1} = \tilde{V}_1, \ \mathcal{S}_1^{k+1}|_{\Gamma_2 \cap \partial\Omega_1} = \tilde{S}_1, \ \mathcal{V}_1^{k+1}|_{\Gamma_{11}} = \mathcal{V}_2^k|_{\Gamma_{11}}, \end{array} \right. \quad (24)$$

$$\mathcal{V}_1^{k+1}|_{\Gamma_{22}} = \mathcal{I}_1 \begin{pmatrix} \mathcal{V}_1^{k+1}|_{\partial\Omega_1} \\ \mathcal{S}_1^{k+1}|_{\partial\Omega_1} \end{pmatrix} \quad (25)$$

and

$$\left\{ \begin{array}{l} (H_{\Gamma_1 \cap \partial\Omega_2} \ H_{\Gamma_2 \cap \partial\Omega_2} \ H_{\Gamma_{22}}) \begin{pmatrix} \mathcal{V}_2^{k+1}|_{\Gamma_1 \cap \partial\Omega_2} \\ \mathcal{V}_2^{k+1}|_{\Gamma_2 \cap \partial\Omega_2} \\ \mathcal{V}_2^{k+1}|_{\Gamma_{22}} \end{pmatrix} = (G_{\Gamma_1 \cap \partial\Omega_2} \ G_{\Gamma_2 \cap \partial\Omega_2} \ G_{\Gamma_{22}}) \begin{pmatrix} \mathcal{S}_2^{k+1}|_{\Gamma_1 \cap \partial\Omega_2} \\ \mathcal{S}_2^{k+1}|_{\Gamma_2 \cap \partial\Omega_2} \\ \mathcal{S}_2^{k+1}|_{\Gamma_{22}} \end{pmatrix} \\ \mathcal{V}_2^{k+1}|_{\Gamma_1 \cap \partial\Omega_2} = \tilde{V}_2, \ \mathcal{S}_2^{k+1}|_{\Gamma_2 \cap \partial\Omega_2} = \tilde{S}_2, \ \mathcal{S}_2^{k+1}|_{\Gamma_{22}} = \mathcal{V}_1^{k+1}|_{\Gamma_{22}}, \end{array} \right. \quad (26)$$

$$\mathcal{V}_2^{k+1}|_{\Gamma_{11}} = \mathcal{I}_2 \begin{pmatrix} \mathcal{V}_2^{k+1}|_{\partial\Omega_2} \\ \mathcal{S}_2^{k+1}|_{\partial\Omega_2} \end{pmatrix}. \quad (27)$$

Let  $X_i^{k+1}$ , the vectors containing the unknowns values of displacements or tractions on the boundary of subdomains  $\Omega_i$  for  $i = 1, 2$ , have the following form

$$X_i^{k+1} = \begin{pmatrix} \mathcal{S}_i^{k+1}|_{\Gamma_1 \cap \partial\Omega_i} \\ \mathcal{V}_i^{k+1}|_{\Gamma_2 \cap \partial\Omega_i} \\ \mathcal{S}_i^{k+1}|_{\Gamma_{ii}} \end{pmatrix} \quad (28)$$

The matrices  $A_1$  and  $A_2$  are defined for  $i = 1, 2$  by the following

$$A_i = (-G_{\Gamma_1 \cap \partial\Omega_i} \ H_{\Gamma_2 \cap \partial\Omega_i} \ -G_{\Gamma_{ii}}) \quad (29)$$

Then the algebraic system of Schwarz method associate to problem (6) and (7) is written in the following

$$A_1 X_1^{k+1} = B_1^k, \ A_2 X_2^{k+1} = B_2^{k+1} \quad (30)$$

where

$$B_1^k = -H_{\Gamma_1 \cap \partial\Omega_1} \tilde{V}_1 + G_{\Gamma_2 \cap \partial\Omega_1} \tilde{S}_1 - H_{\Gamma_{11}} \mathcal{V}_2^k|_{\Gamma_{11}} \quad (31)$$

$$B_2^{k+1} = -H_{\Gamma_1 \cap \partial\Omega_2} \tilde{V}_2 + G_{\Gamma_2 \cap \partial\Omega_2} \tilde{S}_2 - H_{\Gamma_{22}} \mathcal{V}_1^{k+1}|_{\Gamma_{11}}. \quad (32)$$

The matrices  $A_1$  and  $A_2$  can be factorized in the following  $A_1 = \mathcal{L}_1 \mathcal{R}_1$  and  $A_2 = \mathcal{L}_2 \mathcal{R}_2$  where  $\mathcal{L}_1, \mathcal{L}_2$  are lower triangular matrices and  $\mathcal{R}_1, \mathcal{R}_2$  are upper triangular matrices. Now from (30)  $X_1^{k+1}$  and  $X_2^{k+1}$  can be obtained by backward followed by forward substitutions. This gives arise to the following algorithm :

**Algorithm 2.**

- (1) Set  $k = 0$ , choose the initial  $\mathcal{V}_2^0 \in \mathbb{R}^{2N_{11}}$  given and a tolerance for the iterative solver
- (2) Compute  $H_i$  and  $G_i$  for subdomains  $\Omega_i$  for  $i = 1, 2$
- (3) Compute  $A_i$  using Eq. (29) for  $i = 1, 2$
- (4) Compute  $\mathcal{I}_i$  using Eq. (23) for  $i = 1, 2$
- (5) Compute  $\mathcal{L}_i$  and  $\mathcal{R}_i$  (decomposition of  $A_i$ ) for  $i = 1, 2$
- (6) Repeat
  - Compute the vector containing known boundary values  $B_1^k$  using Eq. (31)
  - Solve system  $\mathcal{L}_1 \mathcal{R}_1 X_1^{k+1} = B_1^k$
  - Compute internal displacement in subdomain  $\Omega_1$  using Eq. (25)
  - Compute the vector containing known boundary values  $B_2^{k+1}$  using Eq. (32)
  - Solve  $\mathcal{L}_2 \mathcal{R}_2 X_2^{k+1} = B_2^{k+1}$
  - Compute internal displacement in subdomain  $\Omega_2$  using Eq. (27)
  - $k = k + 1$
- Until convergence.
- (7) End.

#### 4. NUMERICAL RESULTS AND DISCUSSIONS

In this section, we illustrate the numerical results obtained using the Dirichlet-Neumann and Schwarz domain decomposition method combined with boundary element method for linear elasticity problem. The comparison of this two domain decomposition method is done in L-shaped domain.

The behavior of the method is investigated evaluating the difference between two consecutive approximations for the displacements solutions and its tractions on the boundary  $\gamma$  given by

$$E_k^i(u) = \|u_i^{k+1} - u_i^k\|_{L^2(\gamma)}, E_k^i(v) = \|v_i^{k+1} - v_i^k\|_{L^2(\gamma)}, E_k^i(t) = \|t_i^{k+1} - t_i^k\|_{L^2(\gamma)}, E_k^i(s) = \|s_i^{k+1} - s_i^k\|_{L^2(\gamma)}. \quad (33)$$

Based on absolute errors the following stopping criterion is considered for Algorithm 2

$$\max(E_k^i(u), E_k^i(v)) < \eta. \quad (34)$$

The stopping criterion for Algorithm 1 is

$$\max(E_k(\lambda), E_k(\beta)) < \eta \quad (35)$$

where

$$E_k(\lambda) = \|\lambda^{k+1} - \lambda^k\|_{L^2(\gamma)}, E_k(\beta) = \|\beta^{k+1} - \beta^k\|_{L^2(\gamma)} \quad (36)$$

where  $\eta$  is a small prescribed positive quantity.

In order to investigate the convergence of the two algorithm, at every iteration we evaluate the accuracy errors defined by

$$G_u^i(k) = \|u_i - u_i^{an}\|_{L^2(\gamma)}, G_v^i(k) = \|v_i - v_i^{an}\|_{L^2(\gamma)}, G_t^i(k) = \|t_i - t_i^{an}\|_{L^2(\gamma)}, G_s^i(k) = \|s_i - s_i^{an}\|_{L^2(\gamma)}. \quad (37)$$

Note that (34) or (35) express that the sequence  $(u^k, v^k)$  converge in sobolev spaces  $H^{\frac{1}{2}}(\gamma) \times H^{\frac{1}{2}}(\gamma)$ . For all numerical experiments, we take  $\eta = 10^{-7}$ . Note that we have  $\gamma = \Gamma_{12}$  for Algorithm 1 and for Algorithm 2  $\gamma_i = \Gamma_{ii}$ ,  $i = 1, 2$ .



#### 4.1. Example 1

In order to illustrate the performance of the numerical method described above, we solve the linear elasticity problem (1), in two-dimensional L-shaped domain  $\Omega = (0, 1) \times (0, 0.5) \cup (0, 0.5) \times (0, 1)$ . We assume that the boundary is split into two parts  $\Gamma_1 = [0, 1] \times \{0\} \cup [\frac{1}{2}, 1] \times \{\frac{1}{2}\} \cup [0, \frac{1}{2}] \times \{1\}$  and  $\Gamma_2 = \{1\} \times [0, \frac{1}{2}] \cup \{\frac{1}{2}\} \times [\frac{1}{2}, 1] \cup \{0\} \times [0, 1]$ . The exact solution of the direct problem is given by

$$u(x, y) = \frac{1 - \nu}{2G} \sigma_0 x, \quad v(x, y) = -\frac{\nu}{2G} \sigma_0 y, \quad t(x, y) = \sigma_0 n_1, \quad s(x, y) = 0 \quad (38)$$

with  $\sigma_0 = 1.5 \times 10^{10}$ ,  $G = 3.35 \times 10^{10}$  and  $\nu = 0.25$ .

This example consists in splitting the domain  $\Omega$  into two rectangular subdomains  $\Omega_1 = (0.5, 1) \times (0, 0.5)$  and  $\Omega_2 = (0, 0.5) \times (0, 1)$  with interface  $\gamma = \{0.5\} \times [0, 0.5]$ .

The evolution of behavior errors as a function of the iteration number using Algorithm 1 is plotted in Fig. 1(a).

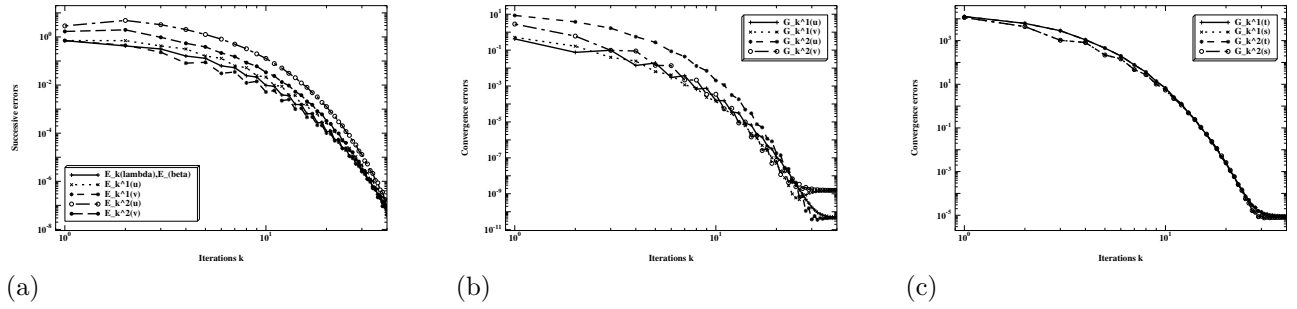


FIGURE 1. The behavior errors given by (33), (35) and the accuracy errors given by (37) as a function of the number of iterations  $k$  on interface  $\gamma$  for Example 1.

Fig. 1(a)-(b) shows that the accurate convergence as a function of the iteration number using Algorithm 1 decreases when the iteration number increases.

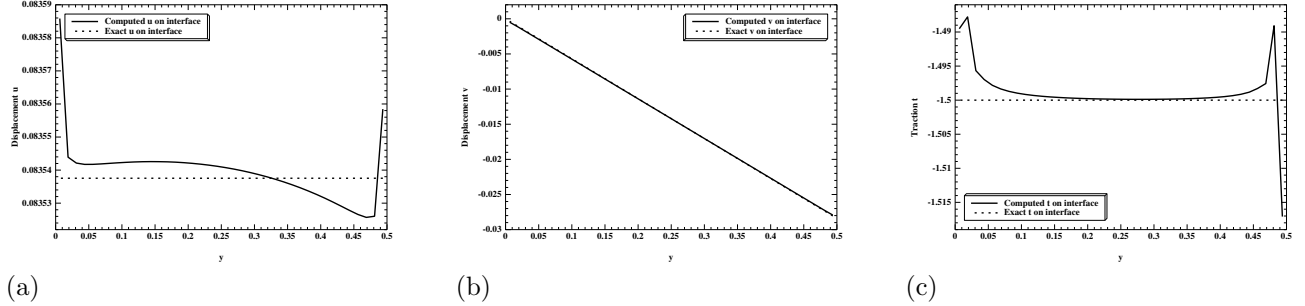


FIGURE 2. Computed and Analytical  $u, v, t$  on interface  $\gamma$  for example 1.

In Fig. 2(a)-(b), we have plotted the exact and computed displacements as a function of  $y \in [0, 0.5]$  using Algorithm 1. The discrepancy is about  $5 \times 10^{-5}$  near to the corner.

We can observe in Fig. 2(c) and Fig. 3(a), where the exact and computed tractions are plotted as a function of  $y \in [0, 0.5]$  using Algorithm 1. The discrepancy is about  $2.5 \times 10^{-2}$  near to the corner.

#### 4.2. Example 2

This example deals with the same exact solution as in Eq. (38). This example consists in splitting the domain  $\Omega$  into two overlap rectangular subdomains  $\Omega_1 = (0, 1) \times (0, 0.5)$  and  $\Omega_2 = (0, 0.5) \times (0, 1)$  with overlap is  $(0, 0.5) \times (0, 0.5)$ .

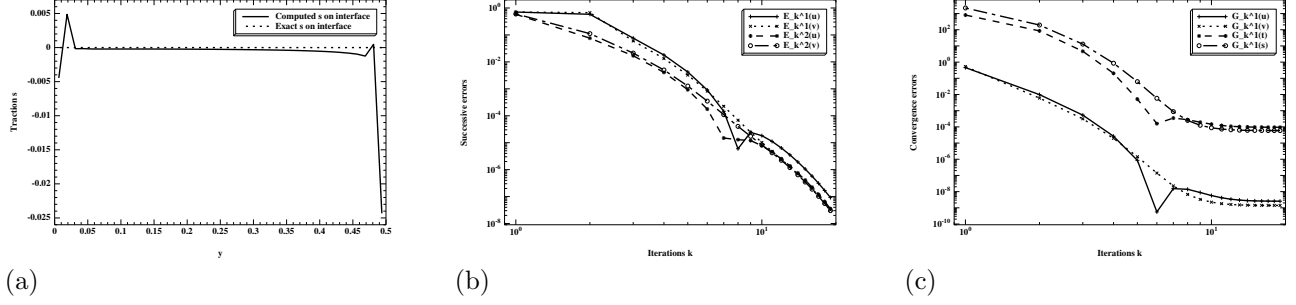


FIGURE 3. Computed, analytical  $s$  on interface  $\gamma$  for Example 1; the behavior errors given by (33) and (34) and the accuracy errors given by (37) as a function of the number of iterations  $k$  on  $\gamma_1$  for example 2.

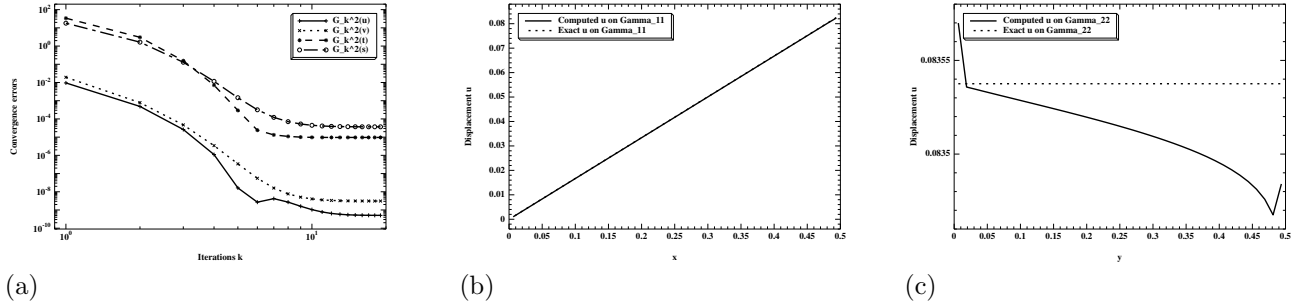


FIGURE 4. The accuracy errors given by (37) as a function of the number of iterations  $k$  on part of boundaries  $\gamma_2$  and computed, analytical  $u$  on  $\gamma_1$  and  $\gamma_2$  for example 2.

In Fig. 3, we observe the convergence of calculated solution to exact solution as a function of the iteration number by the use of Algorithm 2.

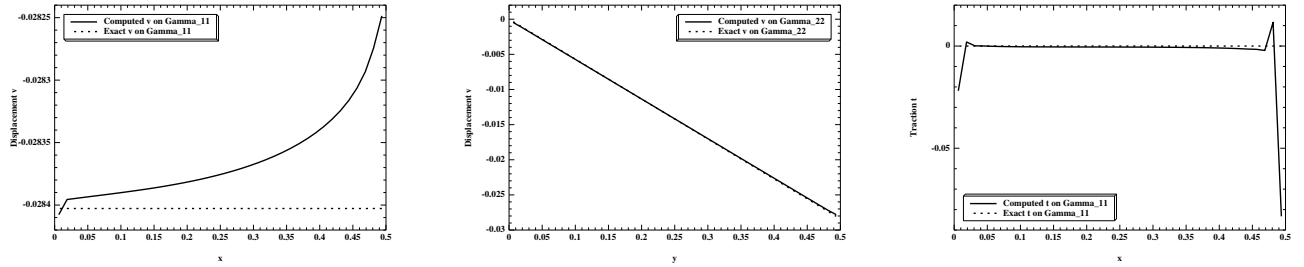


FIGURE 5. Computed, analytical  $v$  on  $\gamma_1$ ,  $\gamma_2$  and  $t$  on  $\gamma_1$  for example 2.

The conclusions drawn from Fig. 3 are graphically enhanced in Figs. 4- 6 which show the numerical results obtained using Algorithm 2 in comparison with the analytical solutions.

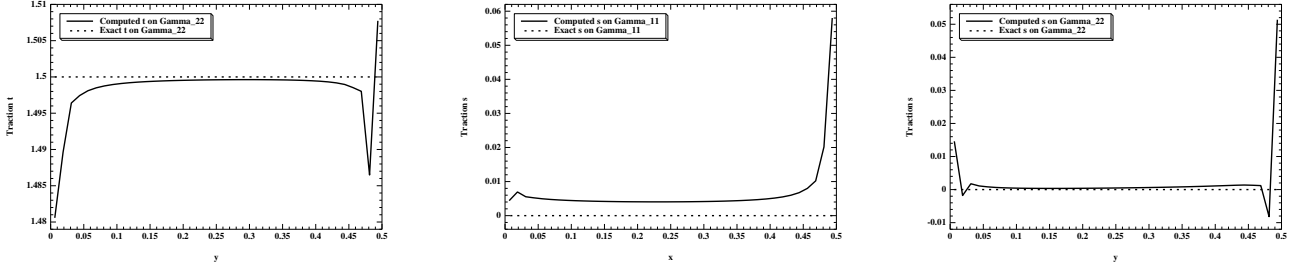


FIGURE 6. Computed and Analytical  $t$  on  $\gamma_2$  and  $s$  on  $\gamma_2$  and  $\gamma_1$  for example 2.

Comparing Algorithm 1 and Algorithm 2 to solve linear elasticity problem in L-shaped domain, we can see from Figs. 2 and 6 that Algorithm 2 requires much less iterations than Algorithm 1. The computed solutions are accurate and consistent with respect to increasing the iteration number  $k$ .

### 4.3. Example 3

In this example, we consider the union of two circle geometry domain  $\Omega$ . This example consists in splitting the domain  $\Omega$  into two overlap circular subdomains  $\Omega_1 = \{(x, y) \in \mathbb{R}^2 / (x - 0.5)^2 + y^2 = 0.25\}$  and  $\Omega_2 = \{(x, y) \in \mathbb{R}^2 / (x - 0.5(1 + \sqrt{2}))^2 + y^2 = 0.25\}$  with overlap is  $\Omega_1 \cap \Omega_2$ . In order to illustrate the performance of the numerical method described above, we solve the linear elasticity problem (1), in two-circular domain  $\Omega$ . The exact solution of the direct problem is given by.

$$u(x, y) = \frac{1 - 2\nu}{2G} \sigma_0 x, \quad v(x, y) = \frac{1 - 2\nu}{2G} \sigma_0 y, \quad t(x, y) = \sigma_0 n_1, \quad s(x, y) = \sigma_0 n_2 \quad (39)$$

with  $\sigma_0 = 1.5 \times 10^{10}$ ,  $G = 3.35 \times 10^{10}$  and  $\nu = 0.25$ .

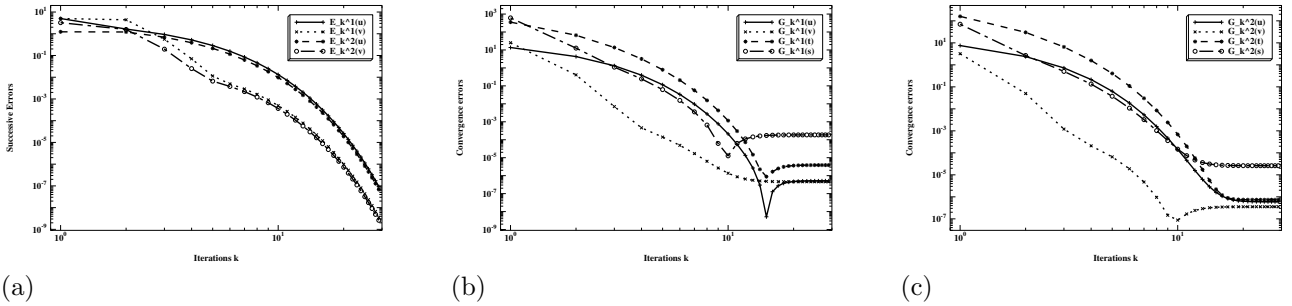
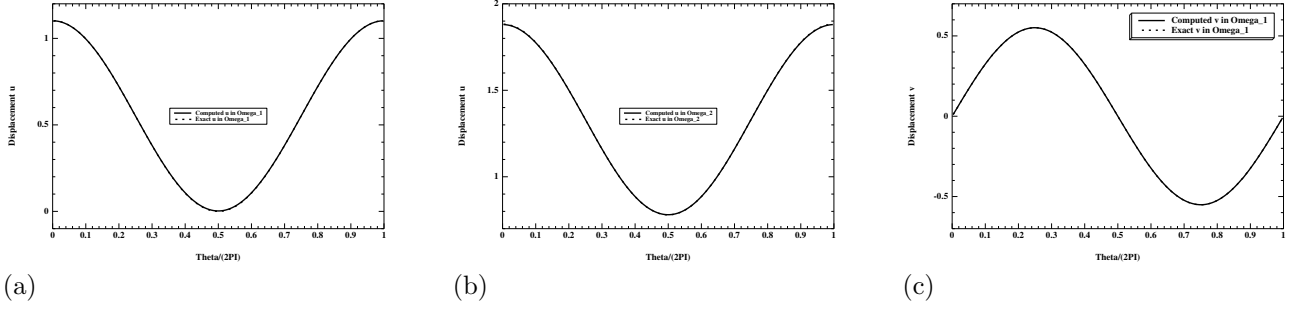
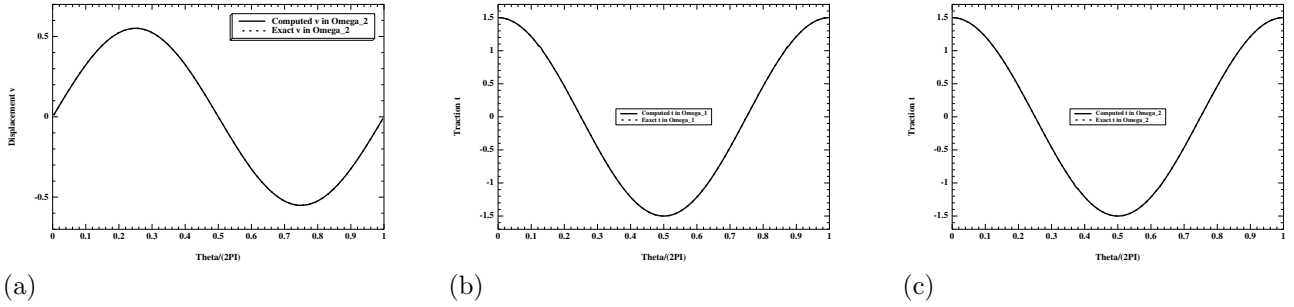


FIGURE 7. The behavior errors given by (33), (34) and the accuracy errors given by (37) as a function of the number of iterations  $k$  on part of boundaries of  $\Omega_1$  and  $\Omega_2$  respectively, for example 3.

As a function of the iteration  $k$ , four behavior errors are illustrated in Fig. 7(a) using Algorithm 2.

In Fig. 7(b)-(c), we observe the convergence of calculated solution to exact solution as a function of the iteration number by the use of Algorithm 2.

The conclusions drawn from Fig. 7 are graphically enhanced in Figs. 8- 10 which show the numerical results obtained using Algorithm 2 in comparison with the analytical solutions.

FIGURE 8. Computed and Analytical  $u$  in  $\Omega_1$ ,  $\Omega_2$  and  $v$  in  $\Omega_1$  for example 3.FIGURE 9. Computed and Analytical  $v$  in  $\Omega_2$  and  $t$  in  $\Omega_1$ ,  $\Omega_2$  for example 3.FIGURE 10. Computed and Analytical  $s$  in  $\Omega_1$ ,  $\Omega_2$  for example 3.

## 5. CONCLUSION

A domain decomposition coupled with Boundary element method was presented to solve linear elasticity equations in complicated geometries. Three examples of domain are given. Stopping and two accuracy criteria given by Eq. (35) for Dirichlet-Neumann method, Eq. (34) for Schwarz method and accuracy criteria given by Eqs.(37) have been used. The numerical results presented in the last section showed that the alternating Algorithm 1 and Algorithm 2 produces an accurate numerical solution of problems given by Example 1-3 with respect to increasing the number of iterations. Numerical results for Example 1 show that Algorithm 2 is more robust than Algorithm 1.

## ACKNOWLEDGEMENTS

This work was carried out in the framework of the project ‘DDM for identification problems’ when the first author was a visiting Professor at Laboratoire de Mathématiques Jean Leray, Université de Nantes. The research of the first author was supported in part by ‘Action Intégrée’ France-Maroc MA/05/116.

## REFERENCES

- [1] A. Avudainayagam, C. Vani, A domain decomposition method for biharmonic equation, *Computers and Mathematics with Applications*, 40, 865-876, 2000.
- [2] C. A. Brebbia, J. Dominguez, *Boundary Elements An Introductory course*, Comp. Mech. Pub. McGraw-Hill Book Company, 1992.
- [3] Y. H. De Roeck, P. Le Tallec, M. Vidrascu, A domain-decomposed solver for nonlinear elasticity, *J. Comput. Methods Appl. Mech. Eng.* 99, No.2/3, 187-207 (1992).
- [4] W.M. Elleithy, H. J. Al-Gahtani, An overlapping domain decomposition approach for coupling the finite and boundary element methods, *Eng. Anal. Bound. Elem.* 24, No.5, 391-398 2000.
- [5] P. Goldfeld, L. F. Pavarino, O. B. Widlund, Balancing Neumann-Neumann methods for mixed approximations of linear elasticity, *Lect. Notes Comput. Sci. Eng.* 23, 53-76 2002.
- [6] A. Klawonn, O. B. Widlund, A domain decomposition method with Lagrange multipliers and inexact solvers for linear elasticity, *SIAM J. Sci. Comput.* 22, No.4, 1199-1219 2000.
- [7] A. Nachaoui, J. Abouchabaka, N. Rafalia, Parallel solvers for the depletion region identification in metal semiconductor field effect transistors, *Numer. Algorithms* 40, No.2, 187-199 2005.
- [8] T. Panzeca, M. Salerno, S. Terravecchia, Domain decomposition in the symmetric boundary element analysis, *Comput. Mech.* 28, No.3-4, 191-201 2002.
- [9] A. Quarteroni, A. Valli, *Domain decomposition methods for partial differential equations*, Oxford University Press, Oxford, 1999.
- [10] A. Toselli, O. Widlund, *Domain decomposition methods - algorithms and theory*, Springer Series in Computational Mathematics 34, Berlin Springer, 2005.